

GENERAL CARE FOR UPHOLSTERY

STANDARD COMMERCIAL GRADE FABRICS


- Periodic light vacuuming and imbedded particle removal helps maintain cover material.
- Loose cushions should be turned and fluffed to prevent excessive wear.
- Prompt blotting up of spills with a dry cloth provides best result.
- Ordinary dirt and stains should be removed with a mild soap or shampoo and water, finish by rinsing that area with water and blot it dry.
- For Crypton & Vinyl follow the steps outline above, but where a persistent stain exists fashion a paste of equal

CSelect will use its best judgement in applying COM Fabric if specific instructions are not included with the order. We will not be responsible if the customer does not like the application of the fabric to the frame.

parts laundry detergent and water let sit for a minute or two, and then rinse with water and blot dry.



REGULAR
Pattern runs
top to bottom



RAILROADED
Pattern runs
side to side

COM INFORMATION

What is Railroaded?

This feature allows reduction of seams and enables smoother furniture tailoring.

FULLY UPHOLSTERED SEATING SPECIFICATIONS

FRAME:

The frame construction consists of a combination of kiln dried hardwoods and hardwood plywood. Joint construction will consist of Butt Joints. Dado Joints and Dowel Joints, glued together with high-solids poly vinyl adhesive. Joints are reinforced with corner blocks and screws at critical stress areas. Corner blocks are also hardwood. Epoxy coated fasteners have a minimum penetration of 1 ¼". ¾" CDX plywood may be used in non-stress areas. Legs are tapered solid hardwood attached to inner frame structure with hardened sheet metal screws.

SEAT DECK:

The seat deck support system consist of 8 ga. Regular loop sinuous wire springs. Springs are attached to the frame using insulated clips stapled closed. There are two rows of insulated tie wires attached to each spring using insulated clips. Each sofa and loveseat will have double springs next to the arm to insure even uniform support. Springs will be separated from the seat cushion using a triple overlay consisting of a polyester non-woven fabric over the springs, polyester fiber deck pad and polyester flex deck denim (expanded vinyl deck when moisture protection option is ordered).

SEAT CUSHIONS:

Seat cushions are constructed with a 5 ½ - 1.8 pound density, 36 lb. Polyurethane core wrapped with a 1 ¼ oz Da-

cron with ticking. All "Bio-Flex" – (Earth Friendly) polyurethane filling materials are treated with flame retardant agents to meet Cal Technical Bulletin 117. Periodic reversing of cushions will insure uniform and even wear. Ottoman cushions are constructed with 5" – 1.5 pound density 36 ILD polyurethane core wrapped with 1 ¼ oz. Dacron with ticking.

INNER BACK:

The inside back construction consists of 11 ga. Sinuous – arc springs attached to the frame using insulated clips stapled closed. One row of insulated tie wire attached to each spring using insulated clips insures uniform support for the back padding materials. The padding material consists of 4 ¼" thick 1.8 pound medium density polyurethane foam. There is a non-woven polyester fabric overlay between the spring and polyurethane foam. All polyurethane filling materials meet Cal Technical Bulletin 117.

ARMS:

The arms are wrapped and the front arms stump is padded with 1.1 pound medium density polyurethane. Outside arms and outside back are covered with heavy duty .085 ga cardboard. All outside surfaces of the furniture are padded with .5 oz. of polyester padding so that all frame members and inner surfaces exposed to the backside of the fabrics are covered.






UPHOLSTERY FINISHES

Amber 	Biltmore 	Brighton 
Cafelle 	Cocobala 	Empire 
Fonthill 	Macadamia 	Natural Ash 
River Cherry 	Studio Teak 	Cypress 
Williamsburg 	Windsor 	

CSelect's photography of wood finishes are not an exact replication of actual wood samples, but are very close. Actual wood samples are available upon request. Please contact your sales representative of our corporate office to request a sample. Please note production finish may vary slightly from samples due to the natural properties of wood, and how wood accepts finish material. Please contact your sales representative OR our corporate office.

NAILHEADS

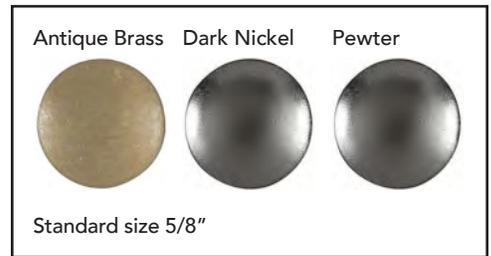

PASS THRU- DECKING

CSelect's Pass Thru-Decking delivers easy maintenance without affecting outward appearance. Pass Thru-Decking maximizes convenience and minimizes maintenance. Phones, pens, keys, all Pass Thru so does liquid



if a barrier fabric is used. Add to that, only staff will ever know. CSelect's Pass Thru-Decking does not affect the outward appearance of the upholstered piece. Pass Thru-Decking is available on a select number of frames.

**Please contact your sales representative or our factory to inquire about this option.*

Simple Moisture Barrier for cushion is an option as well.

CSelect is particularly sensitive to the finish material we use in DINING

How do our FINISH materials resist popular disinfectants?

	3 RAPID APPLICATIONS	1 HOUR SIT IN PLACE	24 HOURS SIT IN PLACE
Clorox	NO EFFECT	Slight but recovers	Creates a white film
Fantastik*	NO EFFECT	NO EFFECT	NO EFFECT
Lysol	NO EFFECT	NO EFFECT	NO EFFECT
Peroxide	NO EFFECT	NO EFFECT	NO EFFECT
Windex	NO EFFECT	NO EFFECT	NO EFFECT

Please feel free to use any of the above. Best protocol is to use any of them with a single application that is then removed with a clean damp cloth shortly thereafter.